


25,000 LB. FORK LIFT SERVICE LIFT

MODEL FI-25

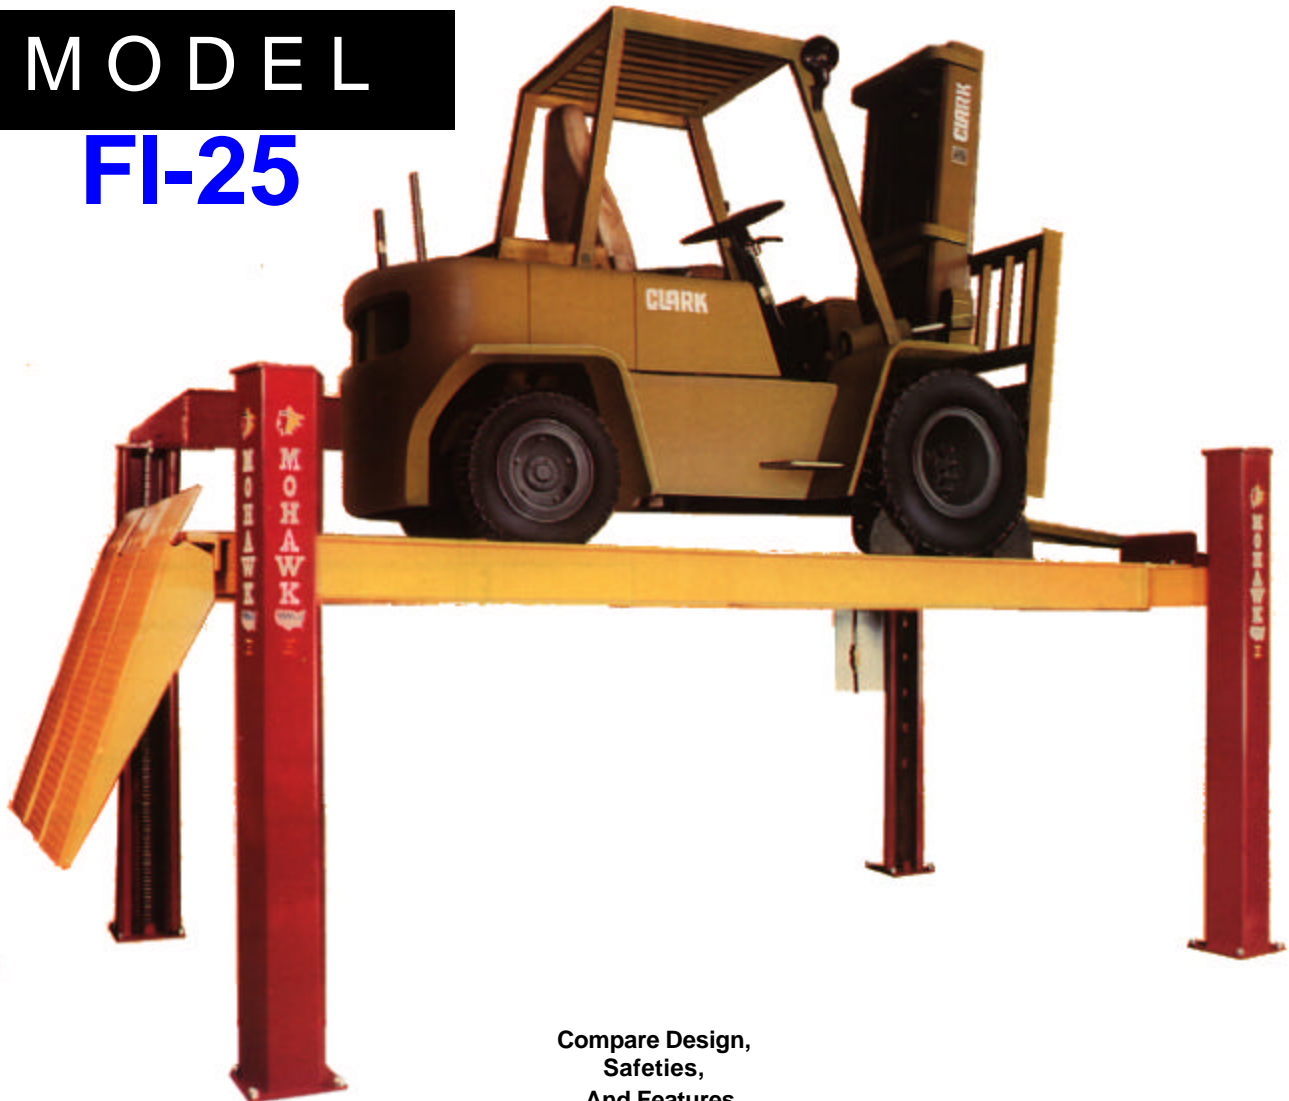

Compare Design, Safeties, And Features

Above Ground Design

- No pits & no in-ground cylinders
- Quick & easy installation
- Allows complete undercarriage access
- 5'9" + lifting height
- Adjustable 24" wide runways accommodate all forklifts



Optional 3-wheel ramp available for certain forklifts


- Runways are made from three parallel 8" steel "I" beams
- Heavy duty 7" x 5" structural steel cross rails
- Large 10" x 6" top rail is reversible to either side
- Chain drive-no stretch or fray like cable lifts
- Specially designed, double sealed, self lubricating, hardened steel rollers at all chain pivot points
- Mohawk offers a full 5 year warranty and the industry's only lifetime cylinder warranty*



Approach ramps fold down out of the way when raised, act as a secondary wheel stop

Unparalleled Safety System

- Multi-position mechanical locks in all four posts
- Hydraulic safeties using pressure-compensated flow control valves and tamper-proof velocity fuses
- Single position, two hand release for safe lowering
- Mechanical chain synchronization
- The heaviest construction of any competitive lift

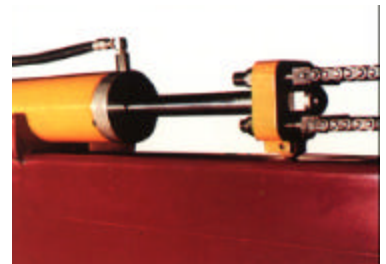

Large 5" cylinder with leaf chain drive system eliminates stretch, fraying, pulleys, and maintenance associated with cable driven lifts

FL-25 SPECIFICATIONS

Capacity:	25,000 Lbs.
Lifting Speed:	120 Seconds
Motor Rating:	2 HP 220V Single-Phase
Lifting Mechanism:	5" Hydraulic Cylinder Attached to (4) #646 Leaf Chains
Overall Length:	19' 4 5/8"
Overall Width:	11' 9 3/16"
Lifting Stroke:	5'
Height @ Full Stroke:	69 5/16"
Track Width:	24"
Track Length:	13'
Track Adjustment:	4' to 8'
Max. Clearance Between Posts:	10' 3"
Mechanical Safety Release:	Single Point
Mechanical Safety Locks:	Multi-Position
Back-Up Hydraulic Safety Systems:	Pressure Compensated Flow Controls & Velocity Fuses
Warranty:	5 Years (Excluding Motor/Pump) Lifetime Cylinder Warranty*
Lift Weight:	4800 Lbs.

Available Options

- 3 phase power: 208/230 3 phase 60 Hz/460 volt 3 phase 60 Hz 380 volt 3 phase 50 Hz/575 volt 3 phase 60 Hz
- Rolling jacking platform
- Air lines plumbed into tracks
- Obstacle sensor package
- 115 volt duplex outlet
- Lockable main switch
- Electric solenoid down valve
- Fluorescent runway lighting
- Audible descent alarm
- Drive through ramps


NOTE: Some options are not compatible with one another.
 NOTE: Larger capacity lifts available. Please see separate brochure.
 Mohawk lifts are manufactured in compliance with the following standards: ANSI, ASME, AISI, ASTM, OSHA, ASA, NEL, AWG, NEMA.

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

Mohawk Resources, Ltd.
 P.O. Box 110
 65 Vrooman Ave
 Amsterdam, NY 12010
 1-800-833-2006
 (518) 842-1431
 FAX: (518) 842-1289



<http://www.atlanticautosuppliers.com>

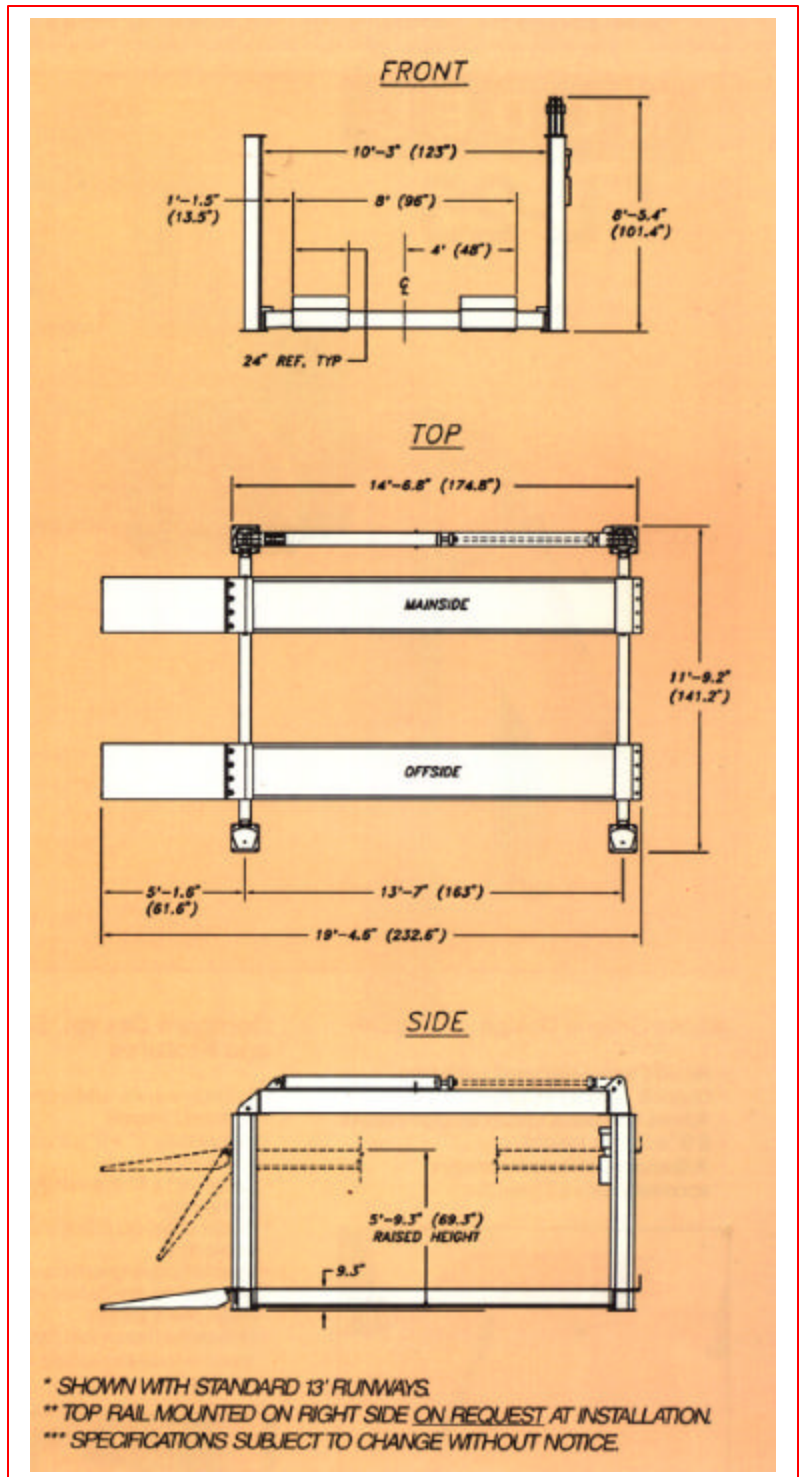

GSA CONTRACT # GS-07F-7099B • CAGE CODE – OC714
 SIN#s 253-22, 253-23, AND 253-38 • NATIONAL STOCK #4910-01-408-5628



For more information on this or any other lift, E-mail
 Atlantic Auto Suppliers at:
mail@atlanticautosuppliers.com

Please Note: Links in BLUE will only work while connected to the Internet.