

25,000 LB FOUR POST RAMP LIFT

MODEL

TR-25




Mohawk – *Because*  
QUALITY LASTS A LIFETIME

**MOHAWK**   
MADE IN THE U.S.A.

# Mohawk TR-25

## The Big Red One.

### For All Your Shop's Lifting Needs



Mohawk TR-25 offers unrestricted under-vehicle access for exhaust, drive-line, transmission, inspection, and all types of vehicle service.



#### Above Ground Design

- Surface mounted operation avoids the environment liabilities and service problems associated with in-ground lifts.
- Indoor or outdoor installation quick & easy.
- Four post design allows complete under-vehicle access for all types or repair **without side obstructions** like scissors and parallelogram lifts.
- Clear floor unobstructed design allows toolboxes, jacks, and other shop equipment to roll freely between the posts.
- Standard 24" wide runways allow greater access for under-vehicle repair.
- Diamond plate covered approach ramps and runways assure additional traction and infinitely longer service life than traction "coated" flat tracks.

#### Versatility and Adaptability

- Mohawk TR-25 lifts RV's, school buses, twin axle tractors, utility vehicles, cars, trucks, and vans. Big or small – Mohawk Lifts them all!
- Available up to 9' wider for winged now plow trucks, large RV mirrors and extra wide vehicles.

#### Feature


- 24" wide runways allow full service to all types or cars, vans, trucks, and buses.
- Full 5' 9" lifting height at top of tracks to tall technicians.
- Adjustable runways accommodate any vehicle up to 25,000 lbs.
- Optional 25,000 lb. capacity 110 volt electric/hydraulic rolling jacking beam locks in place upon positioning.



Optional rolling 25,000 lb. capacity electric/hydraulic jacks operate on 110 volts, to roll between the cross-rails for wheels-free service. Two jacking beams allow the entire vehicle to be raised.




Optional rolling 25,000 lb. capacity electric/hydraulic jacks operate on 110 volts, to roll between the cross-rails for wheels-free tire and brake service. Two jacking beams allow the entire vehicle to be raised.

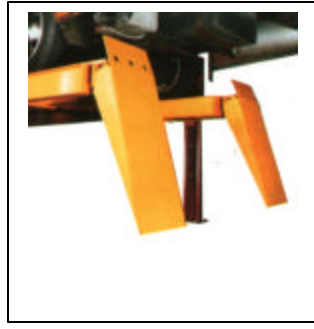

Large 5" chrome plated cylinder with lead chain drive system eliminates stretch, fray, pulleys, and maintenance associated with cable driven lifts.



Optional shatterproof fluorescent track lighting brightens up even the darkest vehicle under-carriage.

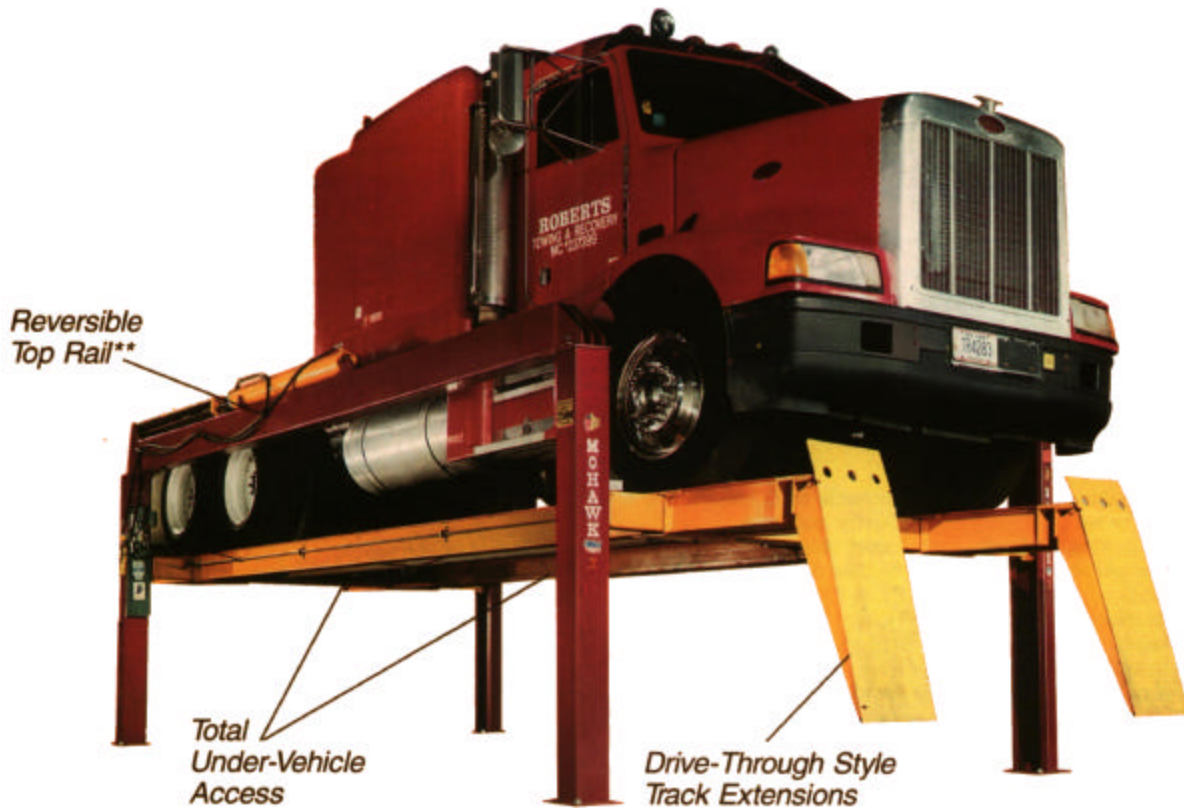

## Compare Design, Safeties, and Features

- Runways are made from two parallel 8" steel I beams.
- Heavy-duty 7" x 5" structural steel cross rails.
- Large 10" x 6" top rail is reversible to either driver or passenger side.
- Chain drive – no stretch or fray like cable lifts.
- Specially designed, double sealed, self-lubricating, hardened steel roller bearings at all chain pivot points.
- Mohawk offers a full 5 year warranty and the industry's only extended cylinder warranty\*.

## Unparalleled Safety Systems

- Multi-position mechanical locks in all four posts.
- Hydraulic safeties using pressure-compensated flow control valves and tamper-proof velocity fuses.
- Single position, two hand release for safe lowering.
- Mechanical chain synchronization.
- The heaviest construction or any competitive lift.

**Just Compare!**

\*See specific cylinder warranty for details

\*\*See back page

**MOHAWK**   
MADE IN THE U.S.A.

# TR-25 SPECIFICATIONS

Capacity:	25,000 Lbs.
Lifting Speed:	120 Seconds
Motor Rating:	2 HP 220 V Single Phase
Lifting Mechanism:	5" Hydraulic Cylinder Attached to (4) #646 Leaf Chains
Overall Length:	26' 4 5/8"
Overall Width:	12' 6 3/16"
Lifting Stroke:	5'
Height @ Full Stroke:	5' 9 5/16"
Track Length:	20' (25' or 30' optional)
Track Width:	24"
Track Adjustment:	4' to 8'
Clearance Between Posts:	11' Standard (Wider Available)
Mechanical Safety Locks:	Multi-Position
Back-Up Hydraulic Safety Systems:	Pressure Compensated Flow Controls & Velocity Fuses
Floor Requirements:	4 1/2" Thick 4000 PSI
Warranty:	5 Years (Excluding Motor/Pump) Extended Cylinder Warranty*
Lift Weight:	4725 Lbs. (20' Model)

## Available Options


- 25' or 30' tracks and top rail
  - 3' track extensions: front, rear, or both
  - 3 phase power
    - 208/230 3 phase 60 Hz / 460 volt 3 phase 60 Hz
    - 380 volt 3 phase 50 Hz / 575 volt 3 phase 60 Hz
  - Alignment: turntable cutouts
- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• Rolling hydraulic jacking beam</li> <li>• Rolling jacking platform</li> <li>• Air lines plumbed into tracks</li> <li>• Obstacle sensor package</li> <li>• 115 volt duplex outlet</li> <li>• Runway lighting</li> </ul> | <ul style="list-style-type: none"> <li>• Lockable main switch</li> <li>• Electric solenoid down valve</li> <li>• Audible descent alarm</li> <li>• Drive through ramps</li> <li>• Rolling oil drain pan (25 gal)</li> <li>• Hand held control</li> <li>• Air locks</li> </ul> |
|---|--|

NOTE: Some options are not compatible with one another.  
 NOTE: Larger capacity lifts available. Please see separate brochure. For shorter wheelbase vehicles (i.e. forklifts), please see FL-25 literature.  
 Mohawk lifts are manufactured in compliance with the following standards: ANSI, ASME, AISI, ASTM, OSHA, ASA, NEC, AWS, NEMA.

**Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.**

Please Note: Links in BLUE will not work unless you're connected to the Internet.

For more information on this or any other Mohawk product, E-mail  
[Atlantic Auto Suppliers](mailto:Atlantic Auto Suppliers)

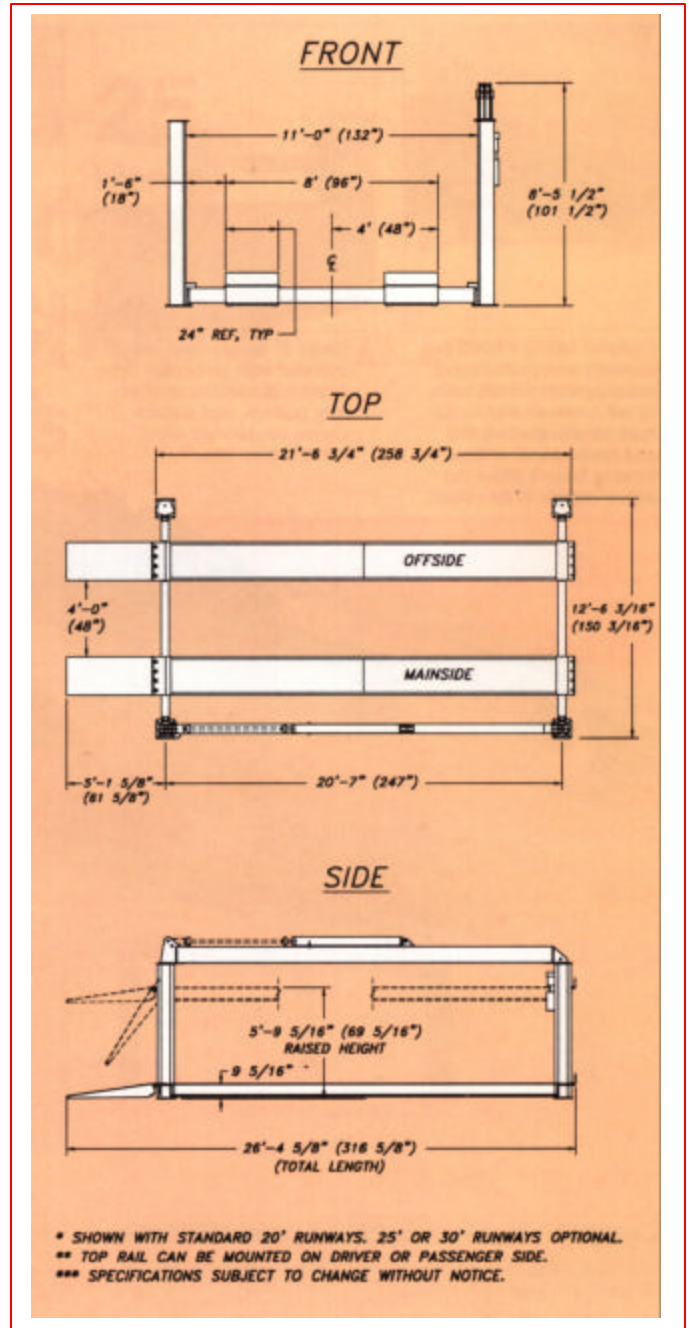

Mohawk Resources, Ltd.  
 P.O. Box 110  
 65 Vrooman Ave  
 Amsterdam, NY 12010  
 1-800-833-2006  
 (518) 842-1431

GSA Contract # GSO7F-7099B  
 SIN#s 253-22, 253-23, & 253-38  
 CAGE CODE - OC714  
 DUNS # 10-1289916

FAX: (518) 842-1289  
[www.atlanticautosuppliers.com](http://www.atlanticautosuppliers.com)

