
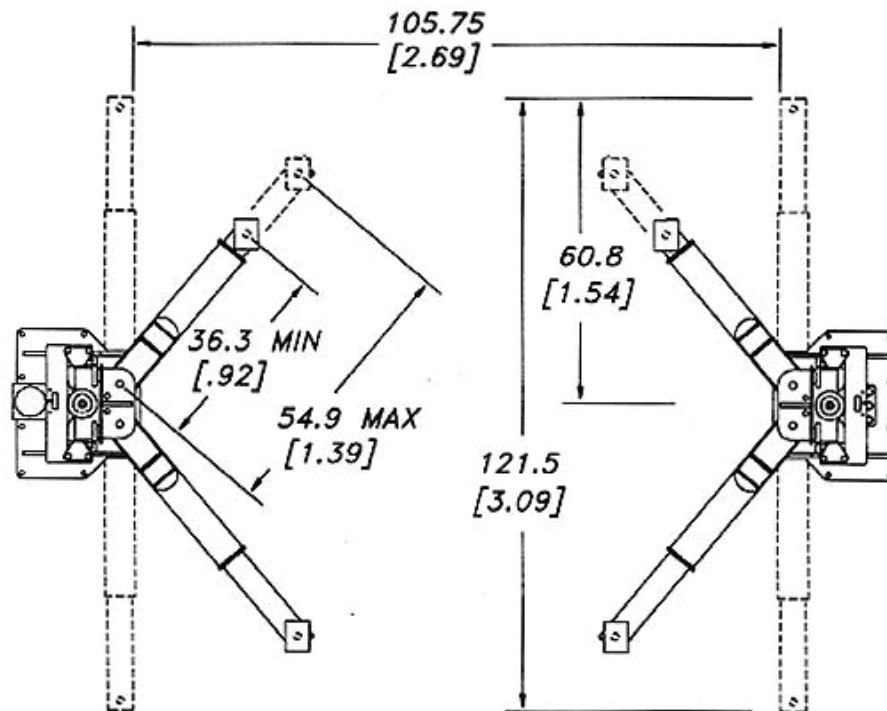


System I Lift Rough Specifications

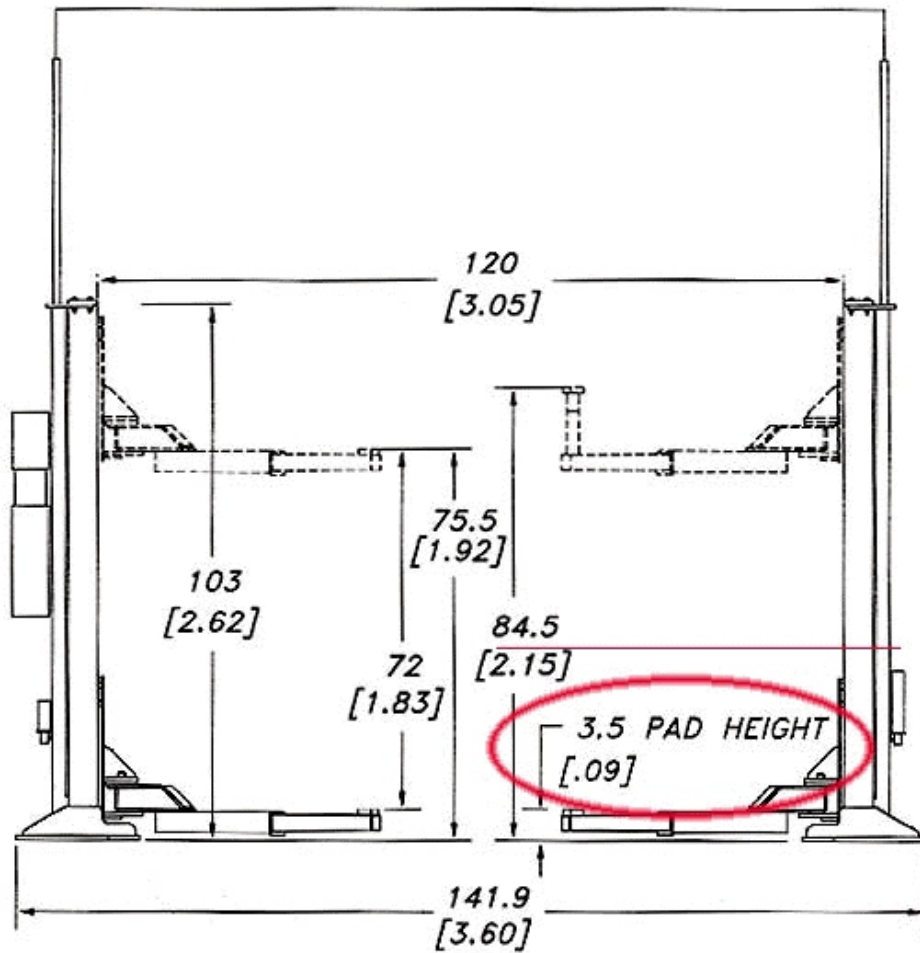

MODEL:**SYSTEM I**

Capacity:	9000 lbs. (4082.33Kg)
Lifting Speed:	45 seconds
Motor Rating:	2 HP/208-230 VAC, single-phase (3 phase optional)
Synchronization:	Hydraulic fluid displacement using no chains, cables, or overhead obstructions
Arm Pad Height:	3 1/2" (8.89 cm) minimum
Lifting Height (Stroke):	6' (1.83 m)
Arm Height @ Full Rise:	6' 3 1/2" (1.92m)
Max. Pad Height with Adaptors:	7'1" (2.16m)
Overall Width:	11'10" (3.61m) (Adjustable)
Width Between Posts:	10' (3.05m) (Adjustable)
Width Between Lifting Arms:	8'10" (2.69m) (Adjustable)
Column Height:	8'7" (2.62m)
Overall Hydraulic Line Height:	12' (3.51m) Standard (adjustable to accommodate any height ceiling or routed in-floor)
Weight:	2500 lbs. (1088.62Kg)
Concrete Floor Requirements:	4000 PSI (27586.2 kPa) mix 4-1/2" (11.43 cm) depth
Anchoring System:	16 3/4" x 5" (1.90 x 12.7 cm) Wej-it bolts
Mechanical Safety Locks:	Automatic; all position; starting @ 5" (7.62 cm) off the floor
Hydraulic Safety Systems:	Automatic; all position
Swing Arm Restraints:	Automatic upon ascent
Cylinders:	2 (1 per column)
Drive System:	#646 leaf chain routed over cylinders
3" Frame Adaptors (stackable):	4 included as standard equipment
6" Frame Adaptors (stackable):	4 included as standard equipment
Steel Carriage Bearings:	8 per carriage, double-sealed, self lubricating
Floor Access Between Posts:	clear and unobstructed
Warranty:	5 years; Lifetime on cylinders*

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

Mohawk Lifts are manufactured in compliance the following standards: ANSI, ASME, AISI, ASTM, OSHA, ASA, NEC, AWS and NEMA.

Certified by Automotive Lift Institute to conform with ANSI/ALI ALCTV-1998 Standard. Meets ANSI, NEC, and NEMA safety codes.